




CMU Split Face Popular Configurations

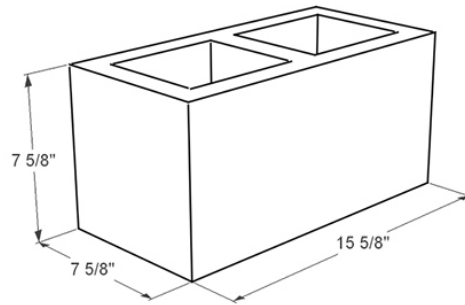


STANDARD

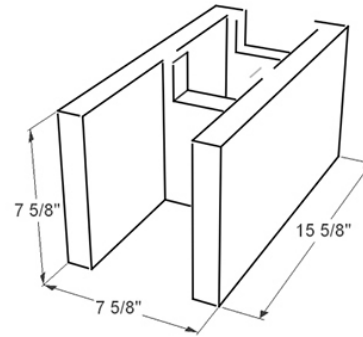


SINGLE OPEN END BOND BEAM

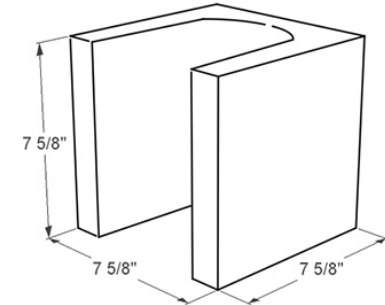


U LINTEL

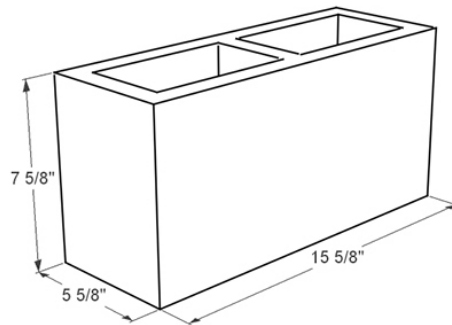

STANDARD (6 IN WIDTH)

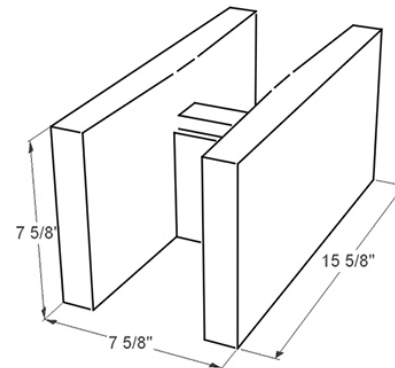

DOUBLE OPEN END BOND BEAM

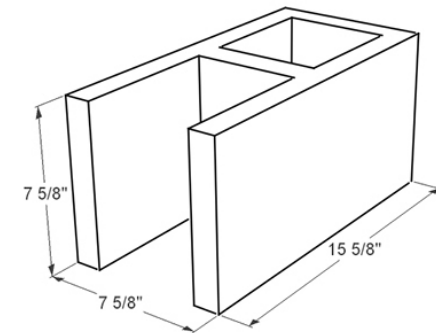

SINGLE OPEN END

- 8 in. high configurations shown - 4 in. and 6 in. high configurations also available.
- Contact ORCO sales for assistance selecting configurations for your project.